

5 YEARS WARRANTY

IP 66

CE

UK CA


RoHS Compliant

UL Certified


Recycling symbol

DUO W3 INSTALLATION GUIDE


READ THE INSTRUCTIONS CAREFULLY BEFORE MOUNTING

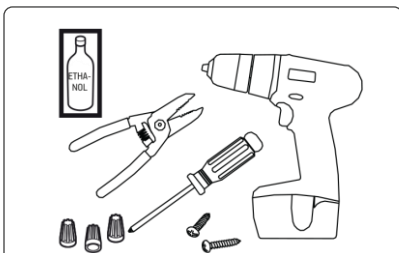


Tools required. Wires, wire strippers, drill, screwdriver, screws, surface cleaner, wire connectors and end caps.

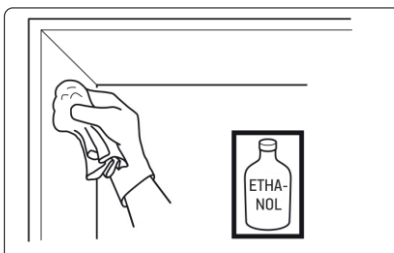


1. Clean the inside of the sign with surface cleaner (e.g. ethanol) to make sure it is free of dirt.

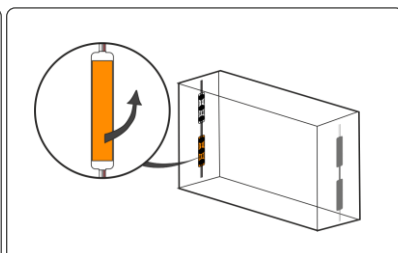


2. Remove protective layer from the backside of the module and stick LED modules into place.

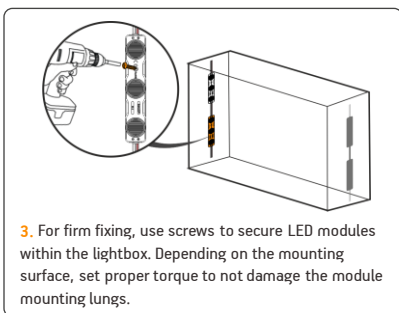


3. For firm fixing, use screws to secure LED modules within the lightbox. Depending on the mounting surface, set proper torque to not damage the module mounting lungs.

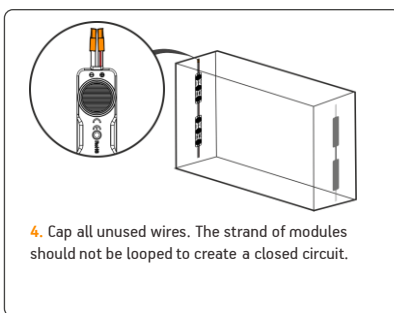


4. Cap all unused wires. The strand of modules should not be looped to create a closed circuit.

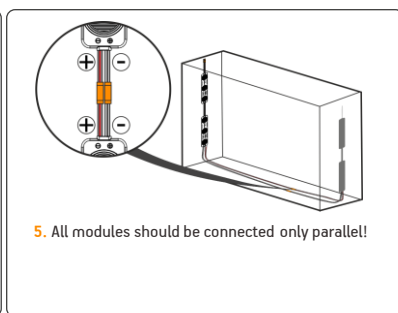


5. All modules should be connected only parallel!

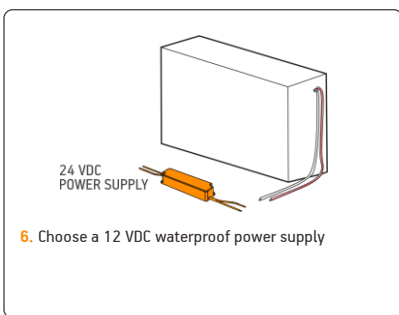


6. Choose a 12 VDC waterproof power supply

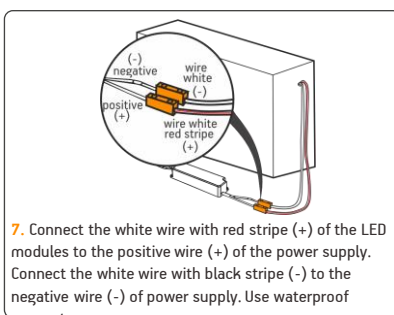

7. Connect the white wire with red stripe (+) of the LED modules to the positive wire (+) of the power supply. Connect the white wire with black stripe (-) to the negative wire (-) of power supply. Use waterproof connectors.

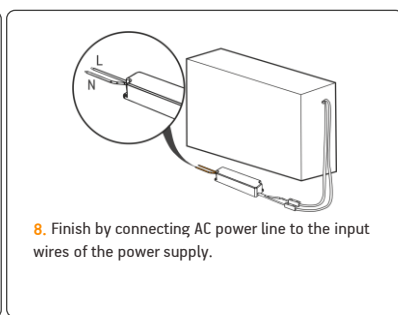

8. Finish by connecting AC power line to the input wires of the power supply.

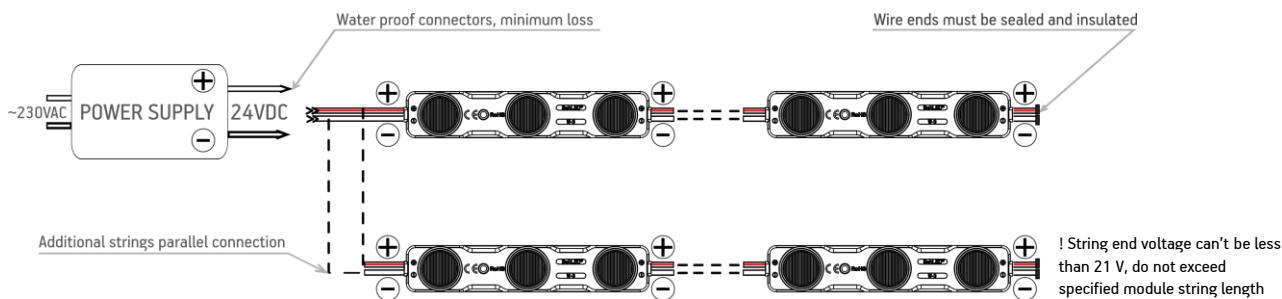

POWER SUPPLY LOAD RECOMMENDATIONS

POWER SUPPLY	QUANTITY	2 m*		5 m*		10 m*	
		modules	mm ²	AWG	mm ²	AWG	mm ²
BPSP-40-24V.1	10	1.5	16	2.5	14	4	12
BPSP-60-24V.1	15	1.5	16	4	13	6	10
BPSP-100-24V.1	25	2.5	14	6	10	10	8

! Power loss less than 5%.
! Recommendations for optimal use of power supply.

5
YEARS
WARRANTY

IP 66

CE

UK
CA

RoHS
Compliant

UL
Certified

—

DUO W3 INSTALLATION GUIDE

MOUNTING AND USING RECOMENDATIONS

- Be careful not to go beyond recommended maximum quantities of modules for a power supply. Overload may cause blinking or a failure.
- These modules are designed to work with constant-voltage power supply. Use only recommended power supplies, do not connect to a constant-current power supplies as it will cause immediate failure of modules.
- Before installing make sure, that the fixing area can bear the total weight of the modules.
- Please install LED modules with appropriate cables. There is a possibility, that cables may get disconnected due to contractions, caused by temperature changes.
- Please check that sulphur constituent is not contained in used components when the module is installed.
- Make sure to install modules in a place with a sufficient breathability in order to prevent lifetime reduction by heat. Operating temperature should not exceed +50 °C.
- When installing a module in a fixture (signboard), make sure to provide ventilation for constituent sulphur, drainage for rain water to prevent aged deteriorations.
- When fixing cables of the modules do not use metal cable stop. The insulation of the cable may be damaged and therefore lead to short-circuited.
- Be sure to install modules at a maintainable place.
- In order to prevent LED from breaking down caused by static electricity, make sure not to touch the metal parts of the cable directly with bare hands.
- Make sure to apply correct polarity and direction of the modules. If mistaken, it will lead to failure and break down of the modules.
- When trying to perform lighting test (burn-in test), be sure to connect module to a power supply. Modules can fail to light up due to over-current. If the power supply is turned on without LED modules connected, modules can be connected only 5 minutes after the power supply has been turned off. Residual electricity may cause damage to modules.
- Avoid applying force while bending, twisting or pulling the power supply cables to minimize the risk of electrical shock.
- If any signs of smoke or the smell of burning plastic occurs, turn off modules immediately and investigate the power supply and the wiring carefully.
- Make sure to record and keep product lot and installation date of the modules.
- Modules can be used at ambient temperatures ranging from -20 °C to +50 °C.

STORAGE AND MAINTANANCE CONDITIONS

- Before the maintenance, turn off the power and maintain the modules after modules cool down. Otherwise, electric shock or burn may occur.
- Do not pull the wiring while removing the modules to prevent possible disconnections.
- Make sure to store modules at dry places, avoid elevated temperatures, high pressures, vibrations, corrosive or combusive gas, direct sunlight.
- Do not wipe or spray modules with volatile materials, such as thinner or benzene as it may lead to combustion and malfunctioning.
- Modules cannot operate at presence of materials containing sulphur components or where sulphur containing gas is generated as it leads to changes in light color and malfunctioning.

GENERAL CONDITIONS

- Installation of modules must carried out by a qualified technician according to handling standards of electrical equipment.
- Modules and power supply have absolute maximum rating. Comply with the specifications to avoid failures or combustion.
- Avoid placing any high temperature objects around the modules, also avoid putting cloth or paper on the modules. It may lead to combustion, burnout, overheat, failure, deformation.
- Modules cannot be used in high-temperature environments, also they must not be subjected to vibration, shock, particles, corrosive or combusive gas. If not followed, it may cause fire, burnouts, bad insulation, failures, overheating and injuries.
- Do not insert or remove power plugs with wet hands to avoid electrical shock.
- While connecting or disconnecting electrical cords avoid being close to any heating equipment. It may lead to melting of the cords cause electrical shock.
- Do not modify the module. This may lead to electrical shock, failure, burnout, changes in module color.
- Do not install modules under direct sunlight or falling water. This may lead to electrical shock, burnouts, overheat, even combustion.
- While installing modules at humid areas, grounding of the power supply must be done.
- Modules cannot be used in combination with other types pf modules, as this may lead to failure.