

LINELIT STRIP



ITEM DESCRIPTION

Flexible LED strips with 112 new generation LEDs reaching up to 160 lm/w efficacy. Comes with double-sided tape for easy peel and use; the low temperature on metal profiles and a popular power option 10 watts per meter. Made from high-quality electronic components ensuring a long lifetime of up to 75 000 h (L80) with 5 years warranty.

APPLICATION


- Aluminium profiles
- Side lighting
- Signs
- General lighting
- Office lighting

FEATURES & BENEFITS


- 5-years warranty
- Durable thermal conductive double-sided adhesive tape
- Compact 10/12 mm width
- Low temperatures on metal profiles

GENERAL SPECIFICATIONS


| | |
|-----------------------|-------------------------------------|
| SUPPLY VOLTAGE | 24 VDC |
| WATTS PER METER | 10 W |
| CRI | 80 |
| LEDs PER METER | 112 |
| CUTTING STEP | 62.5 mm |
| BINNING | 3 SDCM |
| COLOUR / CCT | 6500 K |
| OPERATING TEMPERATURE | -20 °C ~ +60 °C |
| STORAGE TEMPERATURE | +5 °C ~ +70 °C |
| CERTIFICATION | CE and RoHS compliant, UL certified |
| IP CLASS | IP 20 IP 67 |
| LIFETIME | L80 75,000 h |
| WARRANTY | 5 years |
| MOUNTING OPTIONS | double-sided tape |

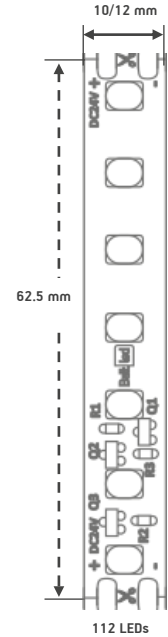

DIMENSIONS, MM

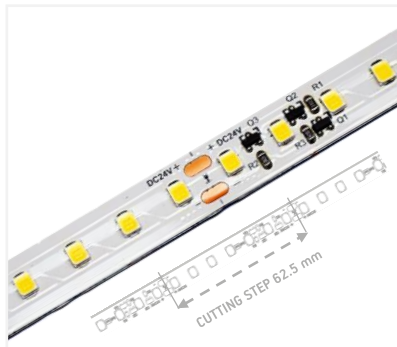

IP 20 | 112 LEDs

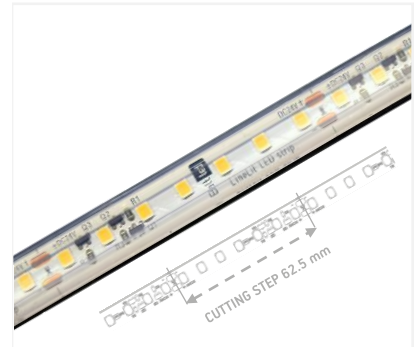

IP 67 | 112 LEDs

ORDERING INFORMATION

| SKU | IP CLASS | STRIP WIDTH | CUTTING STEP, MM | COLOUR | POWER per METER, W | LUMEN OUTPUT, LM |
|------------------|----------|-------------|------------------|--------|--------------------|------------------|
| BLSP-LE112830I10 | IP 20 | 10 | 62.5 | 3000 K | 10.0 | 1348 |
| BLSP-LE112865I10 | IP 20 | 10 | 62.5 | 6500 K | 10.0 | 1424 |
| BLSP-LE112830E10 | IP 67 | 12 | 62.5 | 3000 K | 10.0 | 1237 |
| BLSP-LE112865E10 | IP 67 | 12 | 62.5 | 6500 K | 10.0 | 1307 |

* Pre-order products will be available only with MOQ from 100 meters, lead time 4 – 5 weeks. For precise lead time, contact your Customer Service manager.

PACKAGING INFORMATION

| | METERS per REEL | REELS per BOX | LENGTH per BOX, M | WEIGHT per BOX, kg |
|------|-----------------|---------------|-------------------|--------------------|
| IP20 | 10 | 82 | 820 | 14.1 |
| IP67 | 5 | 20 | 100 | 9.7 |

© 2024, All rights reserved BaltLED, UAB. Specifications are subject to change without notice.