


SIGNAGE SOLUTIONS

QUICK SELECTION GUIDE

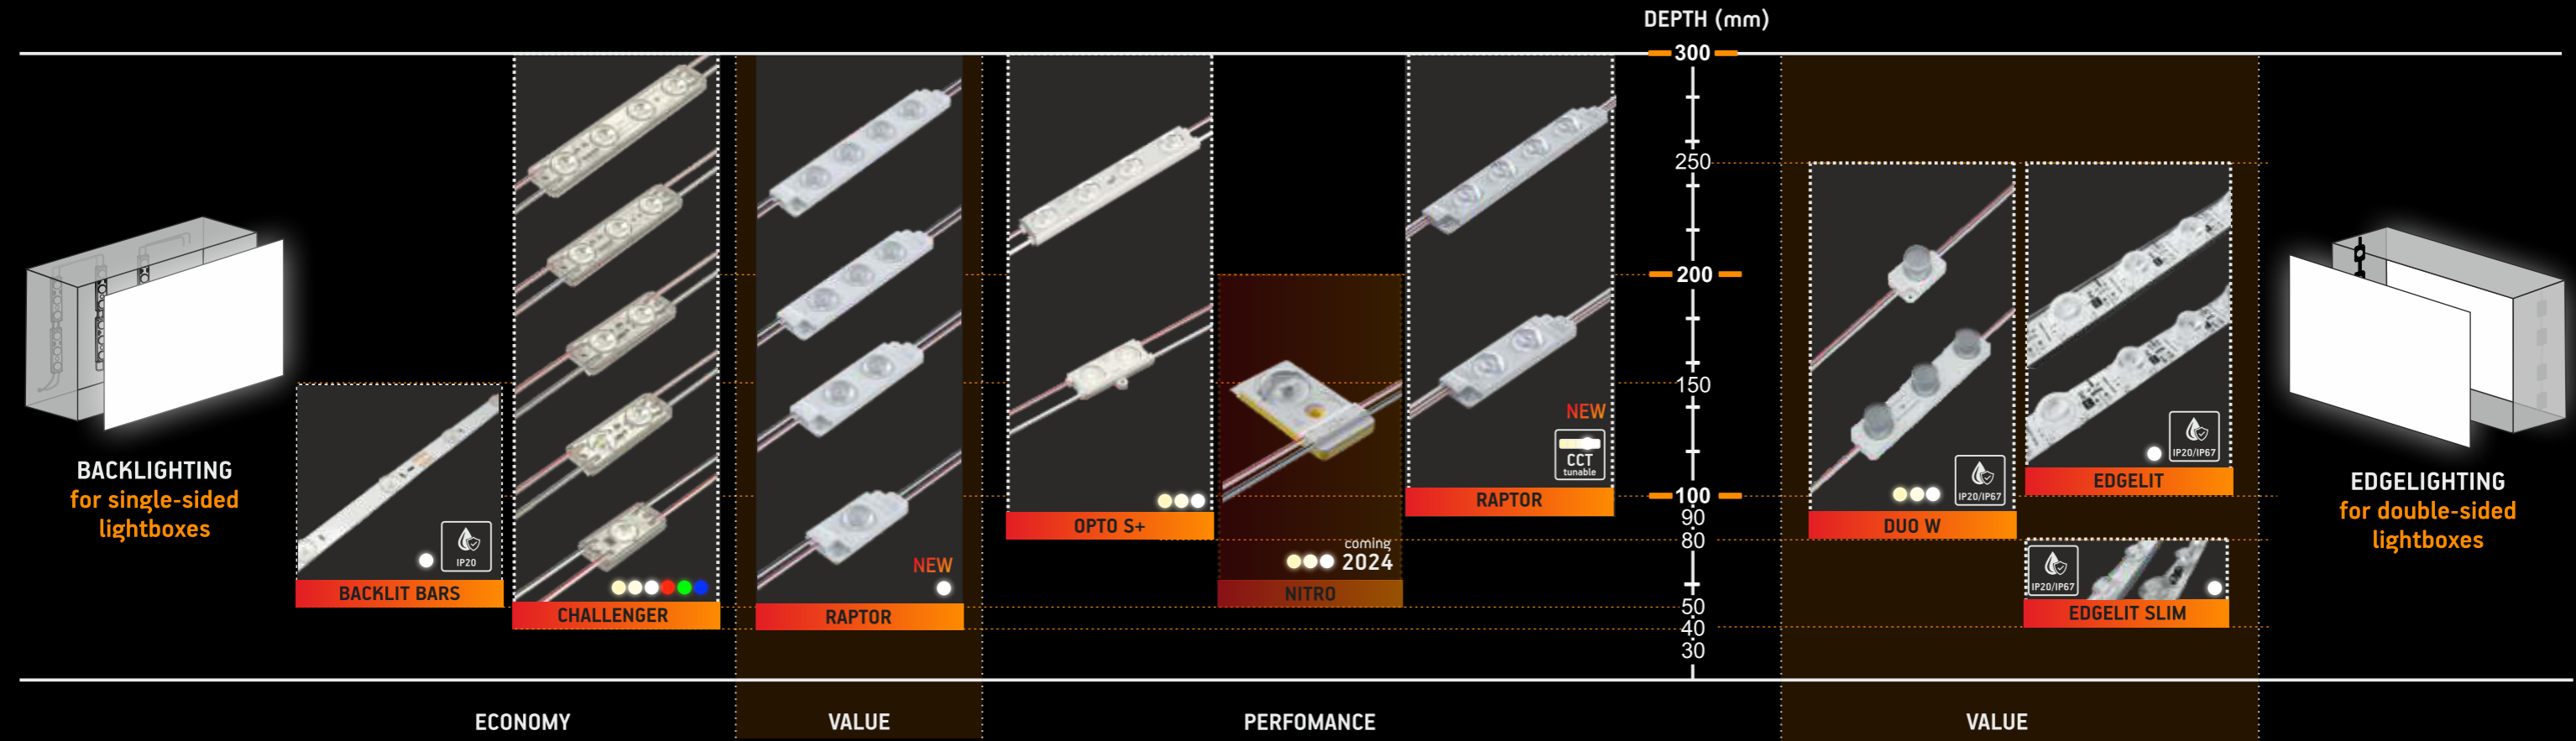

Opto S+

Best at 40-90 80-140 80-150 120-200 130-300 mm depth

Best at 40-300 depth

	OPTO S0+	OPTO S1+	OPTO S2+	OPTO S3+	OPTO S4+
SUPPLY VOLTAGE	12 VDC	12 VDC	24 VDC	12 VDC	24 VDC
POWER	0.5 W	1.0 W	1.0 W	1.45 W	1.8 W
LUMEN OUTPUT	63 LM	122 LM	160 LM	180 LM	300 LM
QUANTITY chain bag box	60 120 1200	35 70 560	45 90 720	35 105 525	40 80 400

5 YEARS WARRANTY | 160° | IP 67 | RoHS Compliant | UK CA | CE

EASY TEAR FINGER-LIFT

CENTRE-TO-CENTRE DISTANCE*, mm

DEPTH	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	220	250	280	300			
OPTO S0+	80	100	120	140	160	170																		
OPTO S1+					160	180	200	210	230	250	250													
OPTO S2+						150	170	190	200	210	250	290	300											
OPTO S3+									240	260	260	270	270	300	310	330	350							
OPTO S4+													350	350	360	360	370	370	380	380	390	390	400	400

Best at 20-60 depth
12 VDC | 0.3 W | 28 LM

50 (chain) | 100 (bag) | 2000 (box)

DEPTH WIDTH	20	30	40	50	60
20	40	50	70	85	85
40	30	50	70	85	85
60	30	45	60	85	85
80		40	60	85	85
100				85	85

5 YEARS WARRANTY | 160° | IP 66 | 85 mm | CE | UK CA | RoHS Compliant

Challenger

Best at 30-160 50-160 80-160 100-240 110-300 mm depth

Best at 30-300 depth

	CHALLENGER 0		CHALLENGER 1		CHALLENGER 2		CHALLENGER 3		CHALLENGER 4	
SUPPLY VOLTAGE	12 VDC	24 VDC	12 VDC	24 VDC	12 VDC	24 VDC	12 VDC	24 VDC	12 VDC	24 VDC
POWER	0.35 W	0.2 W	0.75 W	0.5 W	1.0 W	0.8 W	1.5 W	1.1 W	2.0 W	1.4 W
LUMEN OUTPUT	47 LM	28 LM	92 LM	62 LM	97 LM	119 LM	174 LM	128 LM	233 LM	166 LM
QUANTITY chain bag box	30 210 1470	80 160 1120	38 152 1064	110 220 880	35 140 980	90 180 820	24 120 840	66 132 792	20 100 700	50 100 600

5 YEARS WARRANTY | 160° | IP 67 | RoHS Compliant | UK CA | CE

CENTRE-TO-CENTRE DISTANCE*, mm

DEPTH	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	250	300	
CHALLENGER 0	40	60	90	110	120	130	130	130	130	130	130	130	130	130							
CHALLENGER 1			90	120	140	160	180	190	200	200	200	200	200	200							
CHALLENGER 2						160	180	190	200	210	220	230	230								
CHALLENGER 3								200	220	240	260	280	320	340	340	340	340	340			
CHALLENGER 4									250	280	300	320	340	340	340	340	340	340	340	340	340

Best at 80-150 depth

	BASE 3
SUPPLY VOLTAGE	12 VDC
POWER	0.72 W 1.2 W
LUMEN OUTPUT	72 LM 138 LM
QUANTITY chain bag box	20 100 1400

5 YEARS WARRANTY | 160° | IP 66 | 150 mm | CE | RoHS Compliant | UK CA

Challenger

Best at 60-150 depth

	RGB	RGBW
SUPPLY VOLTAGE	12 VDC	12 VDC
POWER	0.72 W	0.72 W
LUMEN OUTPUT	29 LM	49 LM
QUANTITY chain bag box	20 100 600	

CENTRE-TO-CENTRE DISTANCE*

DEPTH	60	80	100	120	140	150
	60	80	100	120	150	150

5 YEARS WARRANTY | 160° | IP 65 | 150 mm | CE | RoHS Compliant | UK CA

Best at 80-160 140-400 depth

	DUO W1	DUO W3
SUPPLY VOLTAGE	12 VDC	24 VDC
POWER	1.4 W	3.6 W
LUMEN OUTPUT	130 LM	300 LM
QUANTITY chain bag box	30 90 630	10 20 160

5 YEARS WARRANTY | up to 1500 mm | up to 2500 mm | DUO W1 18x50° | DUO W3 15x45° | IP 66 | CE | RoHS Compliant | UK CA

Best at 40-80 100-250 depth

	SLIM	EDGELIT
SUPPLY VOLTAGE	24 VDC	24 VDC
POWER	12.2 W	10 W 17 W 30 W
LUMEN OUTPUT	1500 LM	750 LM 1275 LM 2250 LM

5 YEARS WARRANTY | SLIM 10x30° | EDGELIT 15x45° | IP 67 | CE | RoHS Compliant | UK CA

*Distances provided are based on testing in a lightbox with PLEXIGLAS® XT White WN770 GT, Translucency 30.0%. These are only recommendations and may vary based on application, cover material and other factors. For precise project calculation please contact us at projects@baltled.com

SIGNAGE SOLUTIONS

QUICK SELECTION GUIDE

SIGNBRIDGE coming 2024



ECONOMY

SIGNBRIDGE PLUS coming 2024



VALUE

SIGNBRIDGE PLUS SLIM coming 2024

SIGNBRIDGE PWM coming 2024



PERFORMANCE

SignBridge Plus

BPSP-20-12V.1 12 V 20 W constant voltage LED driver Efficiency ≥84%	BPSP-40-12V.1 12 V 40 W constant voltage LED driver Efficiency ≥86%	BPSP-40-24V.1 24 V 40 W constant voltage LED driver Efficiency ≥86%	BPSP-60-12V.1 12 V 60 W constant voltage LED driver Efficiency ≥86%
BPSP-60-24V.1 24 V 60 W constant voltage LED driver Efficiency ≥86%	BPSP-100-12V.1 12 V 100 W constant voltage LED driver Efficiency ≥92%	BPSP-100-24V.1 24 V 100 W constant voltage LED driver Efficiency ≥92%	BPSP-150-12V.1 BPSP-150-24V.1 150 W constant voltage LED driver Efficiency ≥88%

SignBridge Slim

BPSP.S-60-12V.1 12 V 60 W constant voltage LED driver Efficiency ≥86%
BPSP.S-100-12V.1 12 V 100 W constant voltage LED driver Efficiency ≥92%

SignBridge PWM

BPSP-150-12V.1-B 150 W constant voltage LED driver Efficiency ≥92%	BPSP-150-48V.1-B 150 W constant voltage LED driver Efficiency ≥92%
BPSP-150-24V.1-B 150 W constant voltage LED driver Efficiency ≥92%	