

LINELIT



ITEM DESCRIPTION

LineLit LED strips offer flexible and reliable lighting solutions with up to 224 LEDs per meter for seamless illumination. Available in a versatile color temperature range from 3000K to 6500K, they are perfect for general, office, and signage lighting. Designed for convenience, they feature durable thermal conductive double-sided tape for quick installation and operate on 24VDC with power options of 9.6 W, 20W or 22.4W per meter.

APPLICATION

- Aluminium profiles
- Side lighting
- Signs
- General lighting
- Office lighting


FEATURES & BENEFITS

- 3-years warranty
- Durable thermal conductive double-sided adhesive tape



GENERAL SPECIFICATIONS

SUPPLY VOLTAGE	24 VDC
WATTS PER METER	20 W 22.4 W
CRI	80
LEDs PER METER	120 140 224
CUTTING STEP	50 mm 35.7 mm
BINNING	3 SDCM (3000 K 4000 K) 5 SDCM (6500 K)
COLOUR / CCT	3000 K 4000 K 6500 K
OPERATING TEMPERATURE	-20 °C ~ +40 °C
STORAGE TEMPERATURE	-20 °C ~ +45 °C
CERTIFICATION	CE, RoHS and UKCA compliant
IP CLASS	IP20 IP65
LIFETIME	L70 50,000 h
WARRANTY	3 years
MOUNTING OPTIONS	double-sided tape

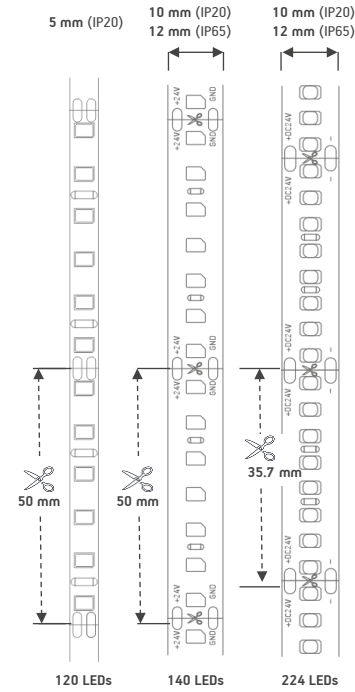

ORDERING INFORMATION

SKU	IP CLASS	LED QUANTITY	CUTTING STEP, MM	POWER per METER, W	COLOUR	LUMEN OUTPUT, LM
BLSP-LE120865I9.6	IP20	120	50	9.6	6500	864
BLSP-LE140865I20					6500	2250
BLSP-LE140840I20					4000	2250
BLSP-LE140830I20	IP20	140	50	20	3000	2100
BLSP-LE224865I22.4					6500	2688
BLSP-LE224840I22.4					4000	2688
BLSP-LE224830I22.4	IP20	224	35.7	22.4	3000	2464
BLSP-LE140865E20					6500	2250
BLSP-LE140840E20					4000	2250
BLSP-LE140830E20	IP65	140	50	20	3000	2100
BLSP-LE224865E22.4					6500	2688
BLSP-LE224840E22.4					4000	2688
BLSP-LE224830E22.4	IP65	224	35.7	22.4	4000	2688
BLSP-LE224830E22.4					3000	2464

PACKAGING INFORMATION

	METERS per REEL	REELS per BOX	LENGTH per BOX, M
IP20	5	50	250
IP65	5	20	100