
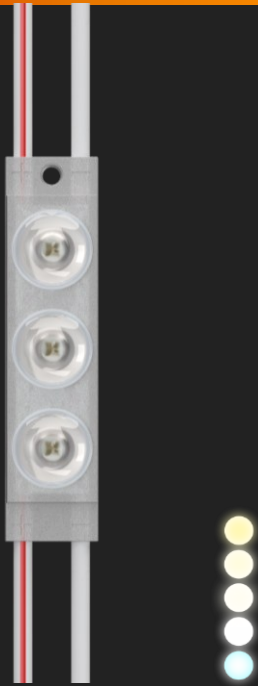


NEPTUN-3



ITEM DESCRIPTION

NEPTUN-3 is a compact, high-efficiency signage module built to thrive in tough environments. With its IP68 waterproof rating, this module withstands dust, water immersion, and outdoor exposure. It runs on 24V, features a slim, low-profile design, and allows for long chains of up to 50 modules, making it perfect for high-volume, precise backlighting applications.

APPLICATION

- Channel letters
- Recommended depth 40-100 mm


FEATURES & BENEFITS

- IP68 protection – for the most demanding conditions
- Ultra-compact size for narrow profiles and tight layouts
- 5 years warranty

GENERAL SPECIFICATIONS


SUPPLY VOLTAGE	24 VDC
POWER	0.36 W
CRI	70
RECOMMENDED DEPTH	from 40 to 100 mm
CC DISTANCE	150 mm
BINNING	5 SDCM
OPERATING TEMPERATURE	-25 °C ~ +55 °C
STORAGE TEMPERATURE	-40° ~ +85 °C
STORAGE CONDITIONS	Relative humidity <60%
CERTIFICATION	CE, RoHS and UKCA compliant
IP CLASS	IP68
LIFETIME	L70 50 000 h
WARRANTY	5 years*

*Warranty is applied only and if storage, mounting and maintenance conditions, stated in the installation guide, are followed.

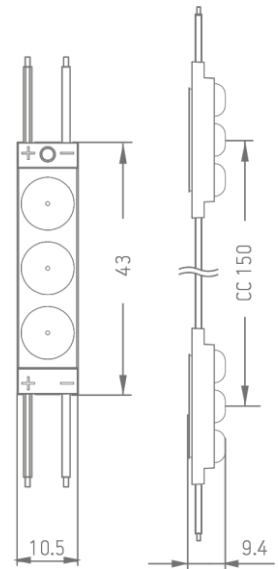

* Dimensions are in mm

LIGHT DISTRIBUTION GRAPH

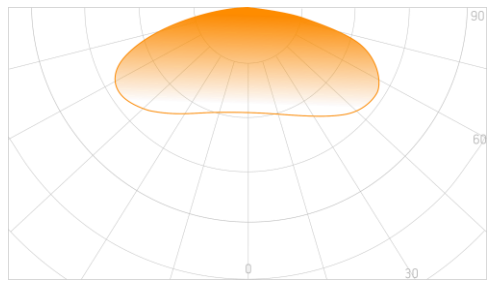

Beam angle: 150°

ORDERING INFORMATION

SKU	POWER, W	LUMEN OUTPUT, LM	COLOUR TEMP.
BMP-N3-730E0.36-24V	0.36	54	3000 K
BMP-N3-740E0.36-24V	0.36	54	4000 K
BMP-N3-750E0.36-24V	0.36	54	5000 K
BMP-N3-765E0.36-24V	0.36	54	6500 K
BMP-N3-771E0.36-24V	0.36	54	7100 K

NOTE: Modules are sold in full bags only, with a minimum order of one bag.

PACKAGING INFORMATION

CHAIN	BAG	BOX
50 pcs.	100 pcs.	1000 pcs.