



PRISMA S1+



GENERAL SPECIFICATIONS

SUPPLY VOLTAGE	12 VDC
POWER	0.36 W
CRI	70
RECOMMENDED DEPTH	from 30 to 50 mm
CC DISTANCE	150 mm
BINNING	4 SDCM
OPERATING TEMPERATURE	-25 °C ~ +60 °C
STORAGE TEMPERATURE	-40 °C ~ +85 °C
STORAGE CONDITIONS	Relative humidity <60%
IP CLASS	IP67
CERTIFICATION	CE, RoHS and UKCA compliant
LIFETIME	L70 50,000 h
WARRANTY	5 years*

*Warranty is applied only and if storage, mounting and maintenance conditions, stated in the installation guide, are followed.

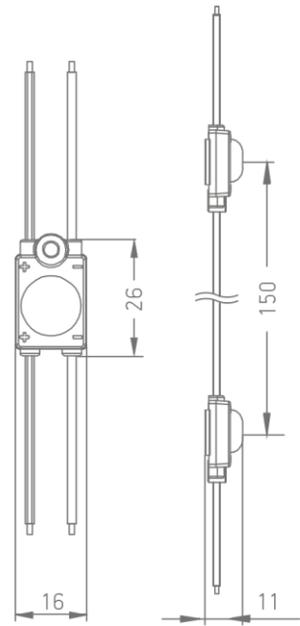

Dimensions are in mm

ITEM DESCRIPTION

Designed for compact lightboxes and slim channel letters, PRISMA S1+ performs best in depths of 30–50 mm. With a wide 175° beam angle, it delivers soft, evenly distributed light - ideal for narrow spaces where precision and uniformity are key.


APPLICATION

- Channel letters signs and single-sided light boxes
- Recommended depth 30 – 50 mm

FEATURES & BENEFITS

- Compact size, ideal for slim profiles and tight layouts
- High efficacy: 153–161 lm/W
- 5 years warranty

LIGHT DISTRIBUTION GRAPH

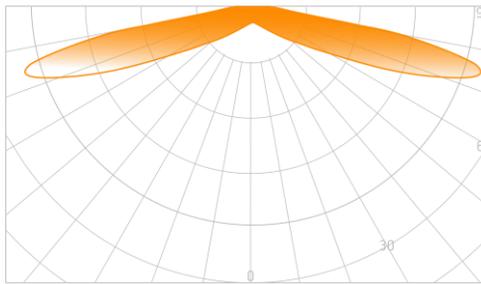

Beam angle: 175°

ORDERING INFORMATION


SKU	POWER, W	LUMEN OUTPUT	COLOUR TEMP.
BMP-PS1-765E0.36	0.36	58	6500K
BMP-PS1-730E0.36	0.36	55	3000K
BMP-PS1-740E0.36	0.36	55	4000K
BMP-PS1-750E0.36	0.36	58	5000K

NOTE: Modules are sold in full bags only, with a minimum order of one bag.

ORDERING QUANTITY

CHAIN	BAG	BOX
45 pcs.	90 pcs.	1170 pcs.

PRISMA S2+



ITEM DESCRIPTION

PRISMA S2+ is your go-to solution for channel letters and lightboxes with 50–100 mm depth. Delivering up to 116 lm at 1.08 W, this module balances brightness and energy efficiency with effortless consistency, thanks to its broad beam angle and smart optical design.

APPLICATION

- Channel letters signs and single-sided light boxes
- Recommended depth 50 – 100 mm


FEATURES & BENEFITS

- Strong brightness with balanced energy use
- High efficacy: 153–161 lm/W
- 5 years warranty

GENERAL SPECIFICATIONS


SUPPLY VOLTAGE	12 VDC
POWER	0.72 W
CRI	70
RECOMMENDED DEPTH	from 50 to 100 mm
CC DISTANCE	250 mm (white) 180 mm (red)
BINNING	4 SDCM
OPERATING TEMPERATURE	-25 °C ~ +60 °C
STORAGE TEMPERATURE	-40 °C ~ +85 °C
STORAGE CONDITIONS	Relative humidity <60%
IP CLASS	IP67
CERTIFICATION	CE, RoHS and UKCA compliant
LIFETIME	L70 50,000 h
WARRANTY	5 years*

*Warranty is applied only and if storage, mounting and maintenance conditions, stated in the installation guide, are followed.

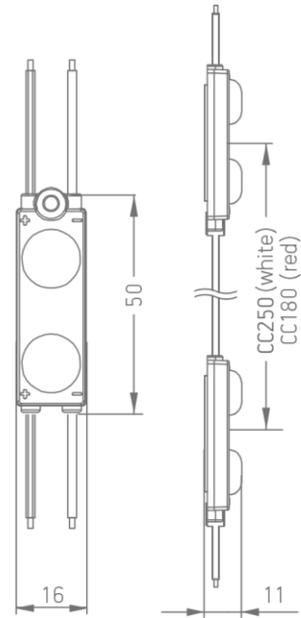

Dimensions are in mm

LIGHT DISTRIBUTION GRAPH

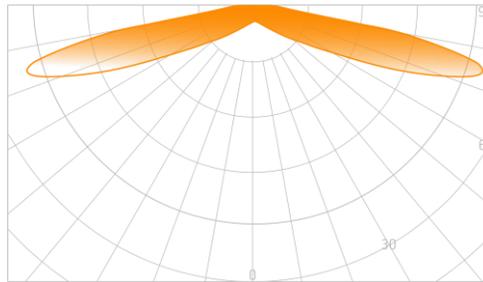

Beam angle: 175°

ORDERING INFORMATION


SKU	POWER, W	LUMEN OUTPUT	COLOUR TEMP.
BMP-PS2-765E0.72	0.72	116	6500K
BMP-PS2-730E0.72	0.72	110	3000K
BMP-PS2-740E0.72	0.72	110	4000K
BMP-PS2-750E0.72	0.72	116	5000K
BMP-PS2-RE0.72	0.72	32	red (625-360 nm)

NOTE: Modules are sold in full bags only, with a minimum order of one bag.

ORDERING QUANTITY

CHAIN	BAG	BOX
25 pcs.	100 pcs.	800 pcs.

PRISMA S3+



ITEM DESCRIPTION

When depth reaches 100–125 mm, PRISMA S3+ shines bright. With an impressive 174 lm at 1.08 W, it's built for larger structures needing more punch without compromising light quality. The beam spread remains broad and uniform, allowing wider spacing and reduced installation density.

APPLICATION

- Channel letters signs and single-sided light boxes
- Recommended depth 100 - 125 mm


FEATURES & BENEFITS

- Higher brightness for larger structures
- High efficacy: 153–161 lm/W
- 5 years warranty

GENERAL SPECIFICATIONS


SUPPLY VOLTAGE	12 VDC
POWER	1.08 W
CRI	70
RECOMMENDED DEPTH	from 100 to 125 mm
CC DISTANCE	300 mm
BINNING	4 SDCM
OPERATING TEMPERATURE	-25 °C ~ +60 °C
STORAGE TEMPERATURE	-40 °C ~ +85 °C
STORAGE CONDITIONS	Relative humidity <60%
IP CLASS	IP67
CERTIFICATION	CE, RoHS and UKCA compliant
LIFETIME	L70 50,000 h
WARRANTY	5 years*

*Warranty is applied only and if storage, mounting and maintenance conditions, stated in the installation guide, are followed.

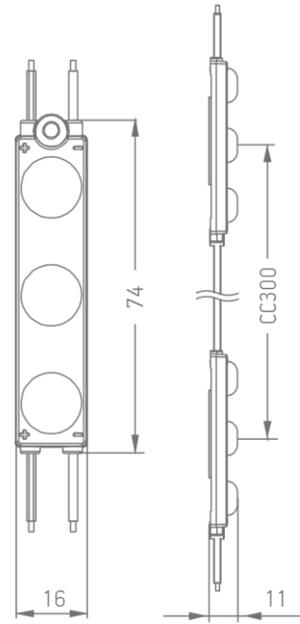

Dimensions are in mm

LIGHT DISTRIBUTION GRAPH

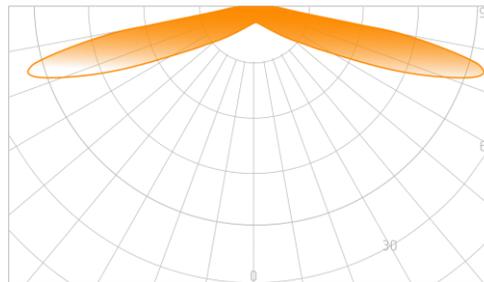

Beam angle: 175°

ORDERING INFORMATION


SKU	POWER, W	LUMEN OUTPUT	COLOUR TEMP.
BMP-PS3-765E1.08	1.08	174	6500K
BMP-PS3-730E1.08	1.08	165	3000K
BMP-PS3-740E1.08	1.08	165	4000K
BMP-PS3-750E1.08	1.08	174	5000K

NOTE: Modules are sold in full bags only, with a minimum order of one bag.

ORDERING QUANTITY

CHAIN	BAG	BOX
20 pcs.	100 pcs.	600 pcs.

PRISMA S4+



ITEM DESCRIPTION

For signage with 125–150 mm depth, PRISMA S4+ is the brightest in the series. At 1.44 W and up to 232 lm, it guarantees high-impact visibility - perfect for large-format, outdoor or high-ambient light conditions where stronger illumination is essential.

APPLICATION

- Channel letters signs and single-sided light boxes
- Recommended depth 125 – 150 mm


FEATURES & BENEFITS

- Most powerful in the range – attention-grabbing brightness
- Efficacy: 153–161 lm/W
- 5 years warranty

GENERAL SPECIFICATIONS


SUPPLY VOLTAGE	24 VDC
POWER	1.44 W
CRI	70
RECOMMENDED DEPTH	from 125 to 150 mm
CC DISTANCE	400 mm
BINNING	4 SDCM
OPERATING TEMPERATURE	-25 °C ~ +60 °C
STORAGE TEMPERATURE	-40 °C ~ +85 °C
STORAGE CONDITIONS	Relative humidity <60%
IP CLASS	IP67
CERTIFICATION	CE, RoHS and UKCA compliant
LIFETIME	L70 50,000 h
WARRANTY	5 years*

*Warranty is applied only and if storage, mounting and maintenance conditions, stated in the installation guide, are followed.

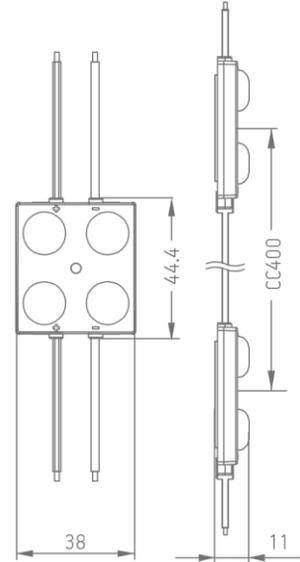

Dimensions are in mm

LIGHT DISTRIBUTION GRAPH

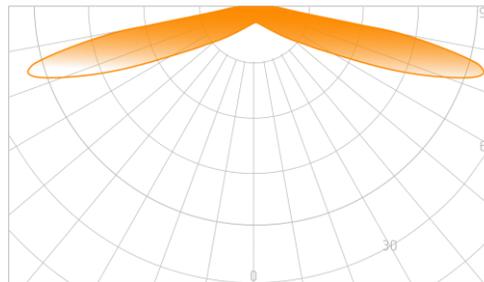

Beam angle: 175°

ORDERING INFORMATION

SKU	POWER, W	LUMEN OUTPUT	COLOUR TEMP.
BMP-PS4-765E1.44-24V	1.44	232	6500K
BMP-PS4-730E1.44-24V	1.44	220	3000K
BMP-PS4-740E1.44-24V	1.44	220	4000K
BMP-PS4-750E1.44-24V	1.44	232	5000K

NOTE: Modules are sold in full bags only, with a minimum order of one bag.

ORDERING QUANTITY

CHAIN	BAG	BOX
36 pcs.	72 pcs.	396 pcs.