CLASSIC WALLWASHER

5 YEARS WARRANTY | 35° | IP20|IP67

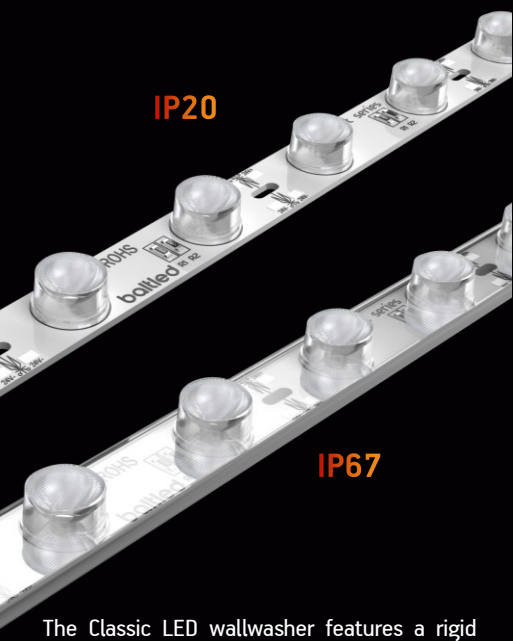

The Classic LED wallwasher features a rigid profile ideal for creating a clean, even wash of light across vertical surfaces. Designed to be installed near the base of a wall, it delivers a symmetrical, narrow optical angle for precise and uniform illumination. Perfect for architectural facades, signage, or interior accent walls where structural lines are straight and uninterrupted.

APPLICATION

- Signage and branding
- Architectural lighting
- Interior design
- Landscape and outdoor lighting
- Stage and event lighting

FEATURES & BENEFITS

- Rigid bar
- Available in IP67 for outdoor applications and IP20 for indoor use
- Easy and fast installation
- 5-years warranty

GENERAL SPECIFICATIONS

SUPPLY VOLTAGE	24 VDC
POWER, W	18 W
CRI	80
OPTICS	35°
COLOUR / CCT	6500 K
CUTTING STEP	80 mm (IP67: cutting requires proper end-cap sealing)
OPERATING TEMPERATURE	-30 °C ~ +50 °C
STORAGE TEMPERATURE	+5°C ~ +70 °C
CERTIFICATION	CE, RoHS and UKCA compliant
IP CLASS	IP20 | IP67
WARRANTY	5 years
MOUNTING OPTIONS	IP 20: double-sided tape IP 67: u shape snap-in clicks

*Warranty is applied only and if storage, mounting and maintenance conditions, stated in the installation guide, are followed.

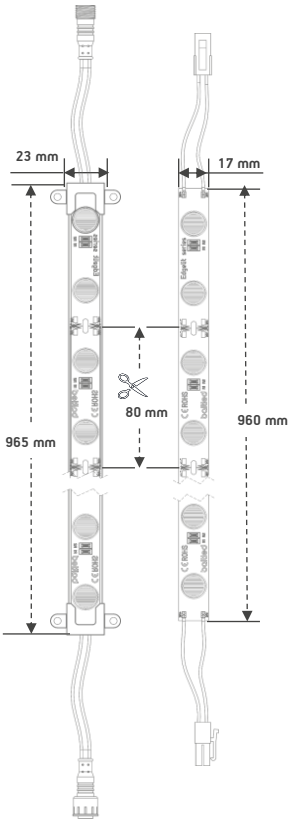

LIGHT DISTRIBUTION GRAPH

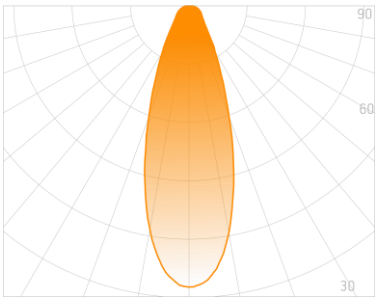

ORDERING INFORMATION

SKU	IP CLASS	COLOUR	POWER, W	LUMEN OUTPUT, LM	DIMENSIONS, MM
BLBP-1000A3565E18-LT	IP67	6500 K	18.0	2542	965x23x10
BLBP-1000A3565I18-LT	IP20	6500 K	18.0	2542	960x17x9
BLBP-LTKIT-2-IP67	Wallwasher accessory connector cable (200mm 20AWG 2pin DC connector IP67 male)				
BLBP-LTKIT-2-IP20	Wallwasher accessory connector cable (200mm 20AWG 2pin DC connector IP20 male)				

PACKAGING INFORMATION

PCS. per BOX
40

© 2026, All rights reserved BaltLED, UAB. Specifications are subject to change without notice.